

# Discoidal Ceramic Capacitors

*Miniature designs down to 0.050 OD.*

## Applications

- Medical implantable devices
- EMI/RF suppression filters
- AC applications up to 240V
- DC applications up to 500V

Ceramic discoidal feedthrough capacitors are the building blocks of the EMI filter industry. APITech's discoidal capacitors provide great versatility in meeting varied voltage, capacitance, and dimensional requirements. These non-polar, multilayer capacitors are small, reliable, and high in dielectric strength.


The versatile nature of our discoidals makes them ideally suited for by-pass and filtering applications. Due to their low inductance construction, these capacitors perform extremely well in high frequency applications. The circular geometry of a discoidal feedthrough capacitor offers many paths to ground, resulting in lower impedance and better filtering performance.

## Metallization


Standard metallization is solderable silver. Other metallization is available upon request.

## Features


- Various OD, ID, and thickness configurations
- Excellent high frequency performance
- Low profile design
- Rugged construction
- Low impedance, many paths to ground
- Low inductance, non-polar
- Operational temperatures of  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  with no voltage de-rating
- Custom designs available including multi-hole, EMI filter arrays and assemblies, high voltage, and high temperature

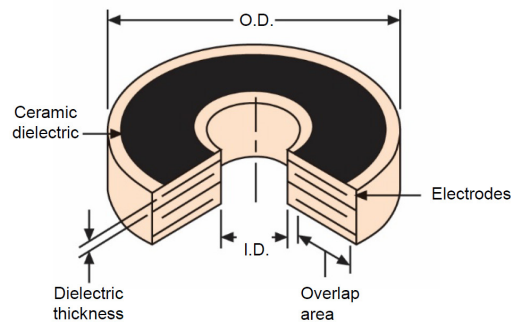

**Insertion Loss (dB) Per MIL-STD-220**

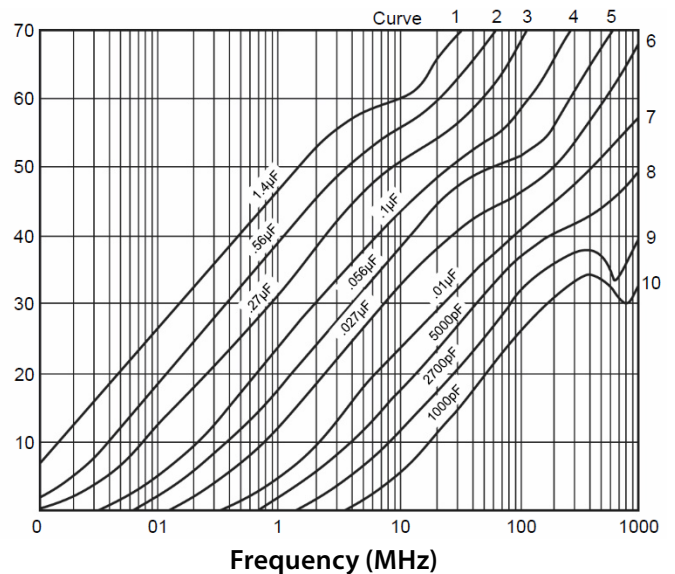

# Discoidal NPO

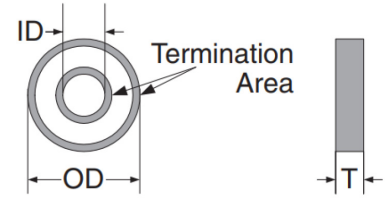


Note: AC voltage determined upon request

OD	(in)	0.05±0.005	0.080±0.005	0.100±0.005	0.135±0.005	0.150±0.010	0.195±0.010	0.340±0.010	0.595±0.010																				
	(mm)	1.27±0.13	2.03±0.13	2.54±0.13	3.43±0.13	3.81±0.25	4.95±0.25	8.64±0.25	15.11±0.25																				
ID	(in)	0.014±0.005	0.030±0.005	0.040±0.005	0.040±0.005	0.045±0.005	0.062±0.005	0.055±0.005	0.055±0.005																				
	(mm)	0.36±0.13	0.76±0.13	1.02±0.13	1.02±0.13	1.14±0.13	1.52±0.13	1.40±0.13	2.41±0.13																				
T MAX	(in)	0.035	0.045	0.060	0.060	0.110	0.120	0.120	0.125																				
	(mm)	0.89	1.14	1.52	1.52	2.79	3.05	3.05	3.18																				
TERM BW	(in)	0	0.000-0.015	0.000-0.020	0.000-0.025	0.000-0.025	0.002-0.025	0.005-0.045	0.005-0.055																				
	(mm)	0	0.00-0.38	0.00-0.51	0.00-0.64	0.00-0.64	0.05-0.64	0.13-1.14	0.13-1.40																				
WV(VDC) Cap(pF)	500	200	100	50	500	200	100	50	500	200	100	50	500	200	100	50	500	200	100	50	500	200	100	50	500	200	100	50	
	33																												
39																													
47																													
56																													
68																													
82																													
100																													
120																													
150																													
180																													
220																													
270																													
330																													
390																													
470																													
560																													
680																													
820																													
1000																													
1200																													
1500																													
1800																													
2200																													
2700																													
3300																													
3900																													
4700																													
5600																													
6800																													
8200																													



# Discoidal Z5U



Note: AC voltage determined upon request

OD	(in)	0.080±0.005	0.100±0.005	0.135±0.005	0.150±0.010	0.195±0.010	0.340±0.010	0.595±0.010																			
	(mm)	2.03±0.13	2.54±0.13	3.43±0.13	3.81±0.25	4.95±0.25	8.64±0.25	15.11±0.25																			
ID	(in)	0.030±0.005	0.040±0.005	0.040±0.005	0.045±0.005	0.062±0.005	0.055±0.005	0.055±0.005																			
	(mm)	0.76±0.13	1.02±0.13	1.02±0.13	1.14±0.13	1.52±0.13	1.40±0.13	2.41±0.13																			
T MAX	(in)	0.045	0.060	0.060	0.110	0.120	0.120	0.125																			
	(mm)	1.14	1.52	1.52	2.79	3.05	3.05	3.18																			
TERM BW	(in)	0.000-0.015	0.000-0.020	0.000-0.025	0.000±0.025	0.002-0.025	0.005-0.045	0.005-0.055																			
	(mm)	0.00-0.38	0.00-0.51	0.00-0.64	0.00-0.64	0.05-0.64	0.13-1.14	0.13-1.40																			
Cap(pF)	WV(VDC)	500	200	100	50	500	200	100	50	500	200	100	50	500	200	100	50	500	200	100	50	500	200	100	50		
	1800																										
2200																											
2700																											
3300																											
3900																											
4700																											
5600																											
6800																											
8200																											
10000																											
12000																											
15000																											
18000																											
22000																											
27000																											
33000																											
39000																											
47000																											
56000																											
68000																											
82000																											
100000																											
120000																											
150000																											
180000																											
220000																											
270000																											
330000																											
390000																											
470000																											
560000																											
680000																											
820000																											
1000000																											
1200000																											
1500000																											
1800000																											
2200000																											
2700000																											
3300000																											
3900000																											
6800000																											
8200000																											
10000000																											
12000000																											
15000000																											

# Discoidal Electrical Testing


Electrical Parameter	Test Method	Temperature Coefficient		
		NPO	X7R	Z5U
Temperature Coefficient	EIA 198	±30 ppm/°C, -55 to 125°C	±15%, -55 to 125°C	+22, -56%, +10 to +85°C
Capacitance Tolerance	EIA Tolerance Code	K, M, P	K, M, P	M, P, Z
Capacitance Test @25°C	MIL-STD-202, Method 305	Cap ≤ 100pF; 1 MHz 1 Vrms Cap ≥ 100pF: 1 KHz, 1 Vrms	1 KHz, 1 Vrms	1 KHz, 0.5 Vrms
Dissipation Factor @25°C	MIL-STD-202, Method 305	.015% max.	3.5% max.	3.5% max.
Aging Rate (per decade)		0%	< 2.0%	< 3.5%
Insulation Resistance @25°C	MIL-STD-202, Method 302	1000 MΩ · μF or 100 KMΩ whichever is less	1000 MΩ · μF or 100 KMΩ whichever is less	1000 MΩ · μF or 100 KMΩ whichever is less
Insulation Resistance @25°C	MIL-STD-202, Method 302	100MΩ · μF or 10 KMΩ whichever is less	100MΩ · μF or 10 KMΩ whichever is less	100MΩ · μF or 10 KMΩ whichever is less
Dielectric Withstanding Voltage	MIL-STD-202, Method 301	250% of rated voltage 5 second hold, 30-50 mA	250% of rated voltage 5 second hold, 30-50 mA	250% of rated voltage 5 second hold, 30-50 mA

## Discoidal Part Numbering System

After determining the capacitor properties required for a given application, use the part numbering system below to place order. If there are any questions, do not hesitate to contact APITech's customer service team.

Example: 340055AX145P6B0

The part number shown represents a discoidal with an outer diameter of 0.340" and inner diameter of 0.055". The voltage rating for this part is 50 VDC. The ceramic type will be X7R. The capacitance value is 1,400,000 pF with tolerance of +100, -0%. The termination will be silver and the parts will receive bulk packaging. Since the last identifier in the part number is "0," there are no special requirements.

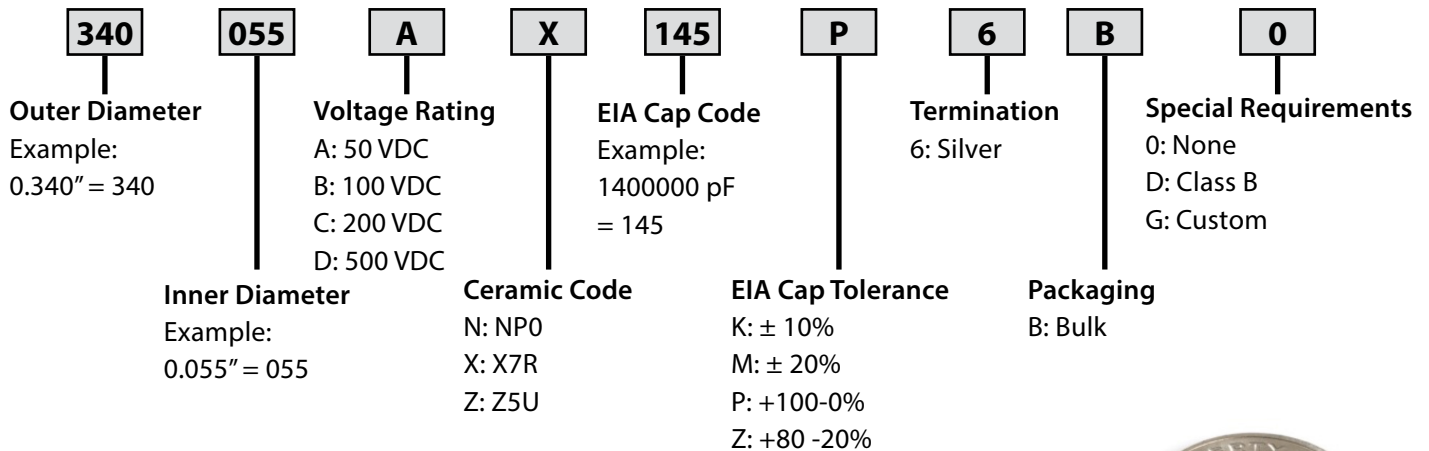

# Processing & Soldering Notes

## General Soldering Recommendations for Leadless Ceramic Capacitors

### Soldering Ceramic Capacitors with High Temperature Process

#### SN10 Solder

*Ramp Rate, Heating and Cooling:* Approx. 30°C/min.

*Peak Temperature:* Approx. 320°C

*Dwell at Peak:* <30 Seconds

### Soldering Ceramic Capacitors with Medium Temperature Process

#### SN96 Solder

*Ramp Rate, Heating and Cooling:* Approx. 30°C/min.

*Peak Temperature:* Approx. 250°C

*Dwell at Peak:* <30 Seconds

### Soldering Ceramic Capacitors with Low Temperature wProcess

#### SN62 Solder

*Ramp Rate, Heating and Cooling:* Approx. 30°C/min.

*Peak Temperature:* Approx. 220°C

*Dwell at Peak:* <30 Seconds

## Notes

Care must be taken to minimize the time silver terminations are exposed to molten solder to avoid leaching (amalgamation of the silver into molten solder). APITech recommends the use of a silver (Ag) bearing solder when terminating directly to ceramic ceramic capacitors to reduce the potential for leaching. Gradual heating and cooling of the components are essential to prevent thermal stresses to the ceramic.

## Application Note: Soldering Recommendations for Switch Mode Power Supply Capacitors

- SMPS capacitors are highly durable structures designed to provide long service per lifetime, however they require attention to basic considerations during assembly. Like all ceramic components, SMPS capacitors are subject to thermal stresses. For this reason, preheating of the capacitor assemblies is recommended. Preheat components using hot plate to 120 to 150°C, or within 50 to 60°C of the soldering temperature being applied. Avoid over-exposure to high temperatures during assembly and allow for gradual, post-assembly cooling.
- For hand iron soldering, recommended soldering iron tip temperature is 330 to 350°C. Contact the pad adjacent to the pre-tinned lead should be made from below the PCB (opposite of the component side), and the dwell time on the solder joint should be less than five seconds. An aluminum heat sink plate may be placed adjacent to the SMPS lead frame to protect the ceramic body during assembly. Avoid direct contact between soldering iron and ceramic during assembly process. Soldering time is dependant upon heat sinking provided by the chassis and boardmaterial, so a longer preheat cycle may be required.
- Standard solders (Sn60, Sn63, Sn60/38/2) may be used. Please consult the factory for use with RoHS compliant solders.
- Use a controlled temperature profile ramp not exceeding 4°C per second as measured by an attached low mass thermocouple.
- Soldering time and temperatures can vary with component size, board material and layout. Please consult the factory for assistance.