

Attenuators SMA

Models: *XXB1 OW-XX, XXB1 OW-XXF & XXB1 OW-XXM*

**up to 18.0 GHz
10 Watts**

Specifications

Electrical

Frequency Range: DC - 18 GHz
Standard Freq. Values: 2.5, 6, 12.4 & 18 GHz
Standard dB Values: 0 - 10, 12, 20, 30 & 40 dB
 in 1 dB Increments

Attenuation Accuracy:

0 - 6 dB	±0.3 dB	±0.5 dB
7 - 20 dB	±0.5 dB	±0.7 dB
21 - 40 dB	±0.7 dB	±1.0 dB

VSWR:

DC - 6 GHz	1.20:1 Max.
6 - 12.4 GHz	1.30:1 Max.
12.4 - 18 GHz	1.40:1 Max.

Input Power: 10 Watts Avg. @ 25 °C
 Derated Linearly to 2 Watts @ + 125 C


Peak Power: 500 Watts Max.
 (5uSec Pulse, .05% Duty Cycle)

Impedance: 50 Ohms

Operating Temp. Range: -65°C to +125°C

Mechanical

SMA Connectors: Passivated Stainless Steel
 Mates with MIL-STD-348
Conductors: Gold Plated Beryllium Copper
Housing: Anodized Aluminum

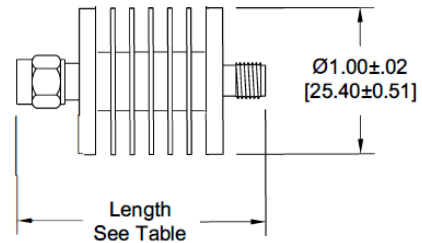

Connector Configuration	Length			
	0 - 20 dB		30 & 40 dB	
	Inches	Millimeters	Inches	Millimeters
Male/Female	1.70 ± .05	[43.2 ± 1.3]	1.95 ± .05	[49.5 ± 1.3]
Male/Male	1.83 ± .05	[46.5 ± 1.3]	2.07 ± .05	[52.6 ± 1.3]
Female/Female	1.57 ± .05	[39.9 ± 1.3]	1.82 ± .05	[46.2 ± 1.3]

How to Order:

Model Number: XXB10W-XXY

Freq. Range
 2 = DC - 2.5 GHz
 6 = DC - 6 GHz
 12 = DC - 12.4 GHz
 18 = DC - 18 GHz

dB Value

Connector Configuration
 = Male/Female
 F = Fem/Fem
 M = Male/Male

Ordering Examples:

Model Number: 18B10W-20
 DC - 18 GHz; 20 dB; Male/Fem

Model Number: 6810W-06F
 DC - 6 GHz; 6 dB; Fem/Fem

Model Number: 12B10W-03M
 DC - 12.4 GHz; 3 dB; Male/Male

*Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 Design specifications are subject to change without notice.
 Contact factory for technical specifications before purchasing or use.*