


## RF Wideband Transformer





## 7336-1

A compact SMD wideband transformer with excellent dielectric strength to meet North American and European standards for reinforced insulation.


Meets safety codes: UL 1950  
CSA C22.2 No.950  
BSI & TUV EN 60950



### MECHANICAL (All dimensions in millimetres)

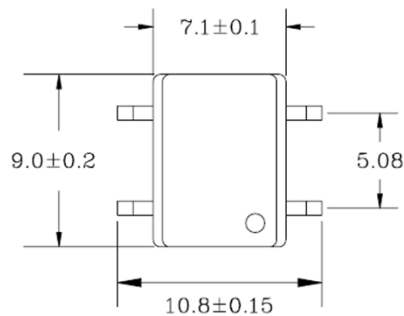

### SCHEMATIC



### ELECTRICAL SPECIFICATIONS @ 25°C

Part Number	Impedance (Ω)	Insertion Loss (dB MAX)	Frequency Response (dB MAX)	Dielectric Strength (VAC)
		50 - 100 MHz	3 - 25 MHz	
7336 - 1	50/50	6	0.2	3000