

RF/Microwave Amplifier



Features

- No Additional Circuitry Needed, Internal Blocking Caps Included
- Unconditionally Stable
- Modifications Available at No Additional Charge
- Environmental Screening Available
- Superior Phase Noise Performance


Technical Specifications

Parameter	Typical 25°C	Min/Max 55°C to +85°C
Frequency Range	1 MHz – 250 MHz	1 MHz - 150 MHz
Gain	15 dB	13.5 dB Min.
Gain Flatness	+/- 0.4 dB	+/- 0.7 dB Max.
Noise Figure (10-150 MHz)	2.5 dB	3.5 dB Max.
Output Power @ 1 dB Compression	+15 dBm	+14 dBm
Output 3 rd Order Intercept	+30 dBm	---
Output 2 nd Order Intercept	+42 dBm	---
Reverse Isolation	18.5 dB	---
Input VSWR	1.5:1	2.0:1 Max.
Output VSWR	1.5:1	2.0:1 Max.
Supply Voltage	+5 volts	+5 volts
Supply Current	35 mA	45 mA Max.

Maximum Ratings

Maximum (No Damage) Ratings	
Storage Temperature	-62°C to +125°C
Operating Temperature	-55°C to +125°C
Case Temperature	+125°C
DC Voltage @ 25°C	+ 8 volts
Continuous RF Input Power	+ 13 dBm
Short Term RF Input Power	50 Milliwatts (1 Minute Max.)
Maximum Peak Power	0.1 Watt (3 µsec Max.)

- Typical values are measured at 25°C, but not guaranteed.
- Max input power +13 dBm with 50 ohms terminated at RF output port.

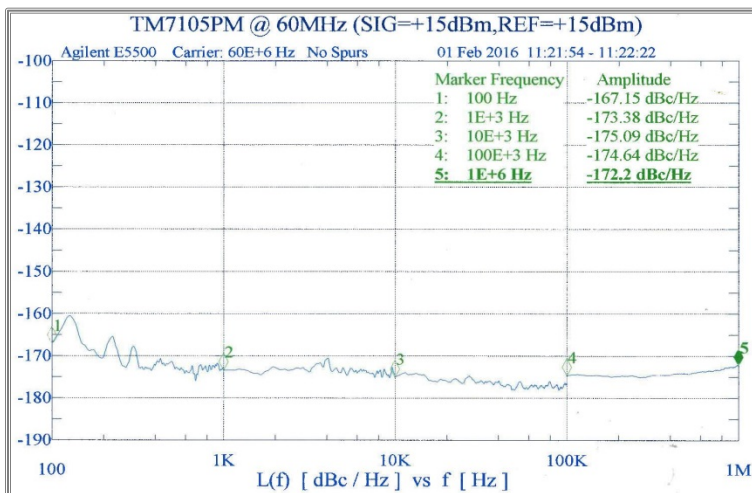

Guaranteed Phase Noise (60 MHz) Performance (dBc/Hz) at 25C


Frequency (Offset)	Typical	Guaranteed
100 Hz	-165	-160
1 kHz	-173	-165
10 kHz	-175	-170
100 kHz	-175	-170
1 MHz	-172	-168

Instructions

Grounding Instructions	Care should be taken to effectively ground each unit.
Revisions	API reserves the right to make revisions to both product and/or the information contained within their datasheets without advanced notice.
Min./Max. Values	Specifications are guaranteed when tested in a 50 Ω (ohm) system from -55°C to +85°C.
Typical performance graphs and values are measured at 25°C, but not guaranteed.	

Outline Drawing

(For reference only (FP7105PM))

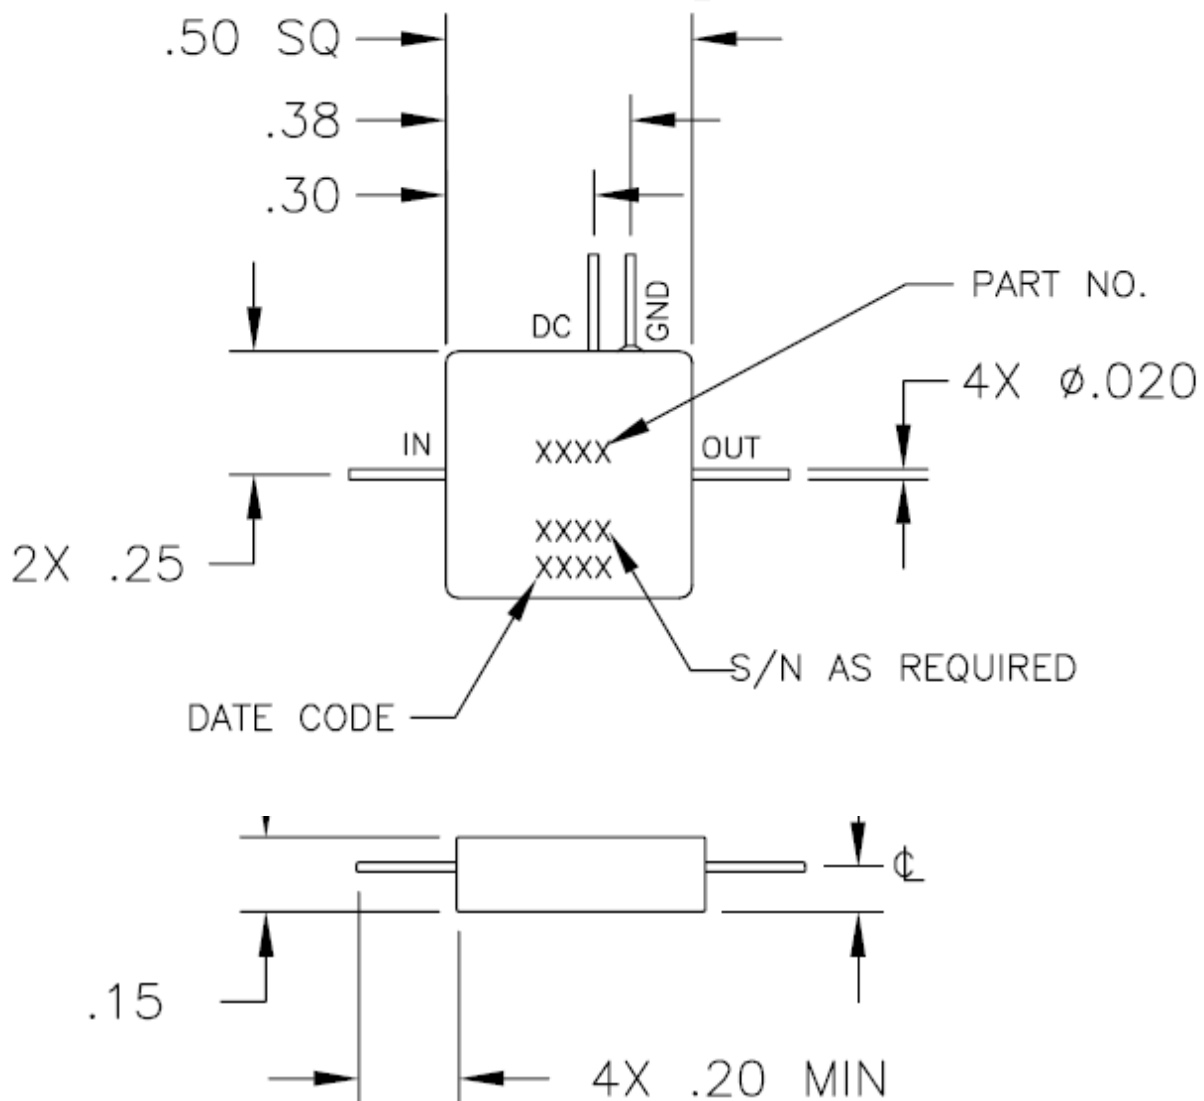

Instructions

Grounding Instructions	Care should be taken to effectively ground each unit.
Revisions	API reserves the right to make revisions to both product and/or the information contained within their datasheets without advanced notice.
Min./Max. Values	Specifications are guaranteed when tested in a 50 Ω (ohm) system from -55°C to +85°C.
Typical performance graphs and values are measured at 25°C, but not guaranteed.	

Outline Drawing

(For reference only (WP7105PM))

.50 Sq 4 Pin GullWing Surface-Mount Package (SG15)

