


Medium Power RF Amplifier

Frequency Range: 700 MHz to 2700 MHz

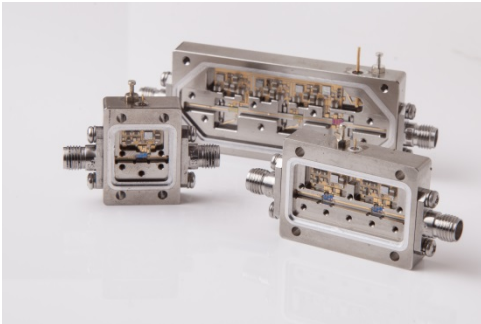

Features

- Wide Bandwidth: 700 MHz-2700 MHz
- High Output Power: +30 dBm
- High Linearity: +54 dBm (IP2)

Model BXMP1221 is a high performance medium power amplifier covering a wide 700-2700 MHz bandwidth. This design also offers excellent linearity and a laser welded housing for the ultimate in environmental protection. This standard model may also be modified or customized in order to optimize any one particular parameter. All specification ratings are based on measurements in a 50 Ω (ohm) system with a DC supply voltage tolerance of +/- 2%.

Technical Specifications

Parameter	Unit	Typical	Min/Max
Frequency Range	MHz	700-2700	700-2700
Gain	dB	31	30
Noise Figure	dB	3.0	4.0
Output Power @ 1 dB Compression	dBm	+30	+29
Output 3 rd Order Intercept	dBm	45	---
Output 2 nd Order Intercept	dBm	54	---
Reverse Isolation	dB	-47	---
Input VSWR	---	1.5:1	2.0:1
Output VSWR	---	1.5:1	2.0:1
Supply Voltage	volts	+15	+15
Supply Current	mA	400	500

Maximum Ratings

Maximum (No Damage) Ratings	
Storage Temperature	-62°C to +125°C
Operating Temperature	-55°C to +100°C
DC Voltage @ 25°C	+18 volts
Input Drive @ 25°C (CW)	+18 dBm


* Typical values are measured at 25°C, but not guaranteed.

Mechanical & Electrical


Parameter	Specification
Specification Temperatures (Min/Max)	-55°C to +85°C
Housing Size	1.36" L x 0.66" W x 0.33" H
Housing Drawing	H2L (SMA Connectorized)

Typical Performance Graphs


Gain

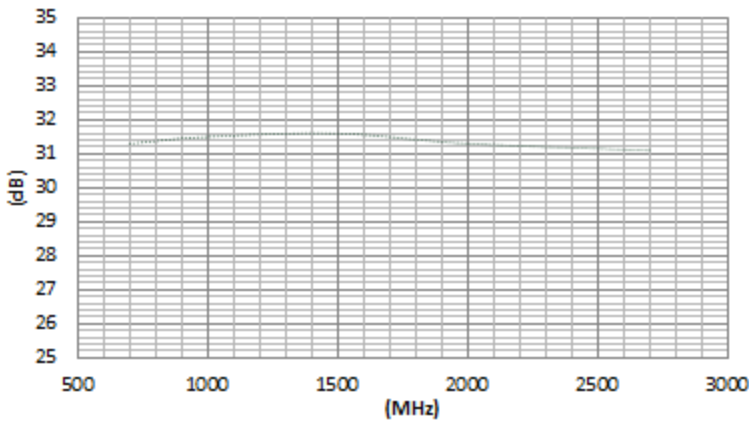


Noise Figure

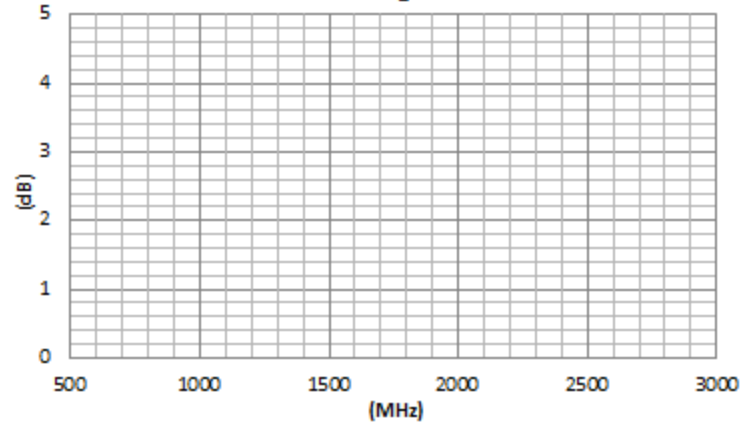


Output Power (1 dB Compression)

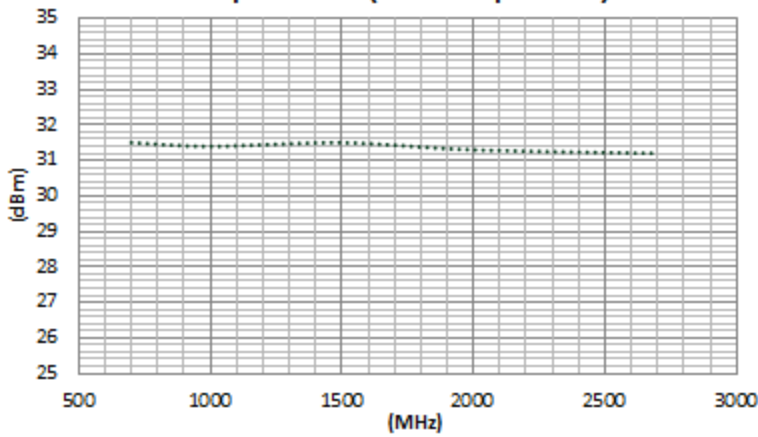


Reverse Isolation

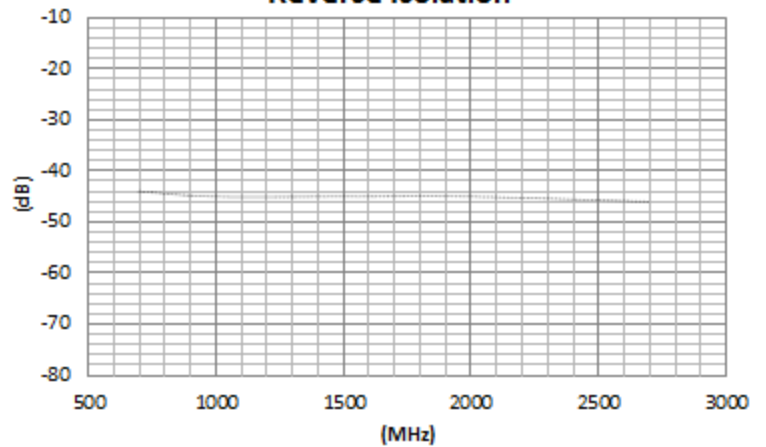

Input VSWR

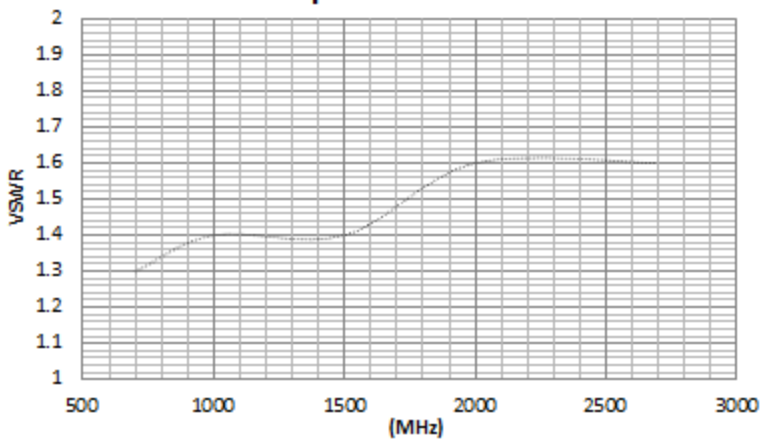

Output VSWR

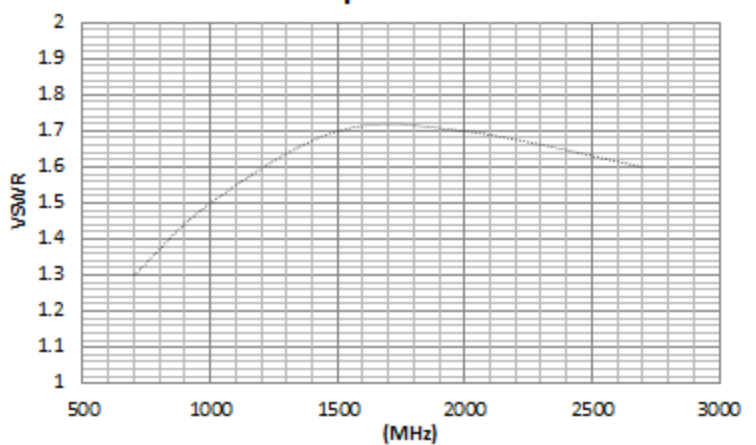

Grounding Instructions	Care should be taken to effectively ground each unit.
Revisions	API reserves the right to make revisions to both product and/or the information contained within their datasheets without advanced notice.
Min./Max. Values	Specifications are guaranteed when tested in a 50 Ω (ohm) system.
Typical performance graphs and values are measured at 25°C, but not guaranteed.	

Outline Drawing (H2L)

(For reference only)

