

Model 32 High Reliability, SMA Connectors Suitable for Space & Airborne Applications

dc to 18.0 GHz

2 Watts

RoHS



Features

- /// Available in 0.5 dB increments from 0-20 dB.
- /// Precision injection molded connectors.
- /// Designed to meet environmental requirements of MIL-DTL-3933.
- /// 100% Subjected to Thermal Shock, Peak Power & Monitored Thermal Cycle (MTC).


Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 18.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY:


Nominal ATTN (dB)	Deviation (dB)
0	+ 0.30
0.5 - 6	± 0.30
6.5 - 12	± 0.50
12.5 - 20	± 0.70

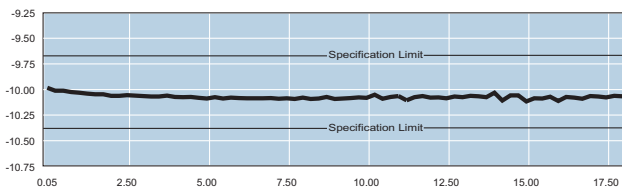

Typical Attenuation Accuracy of 32-10

MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 4	1.15
4 - 8	1.20
8 - 12.4	1.25
12.4 - 18	1.35

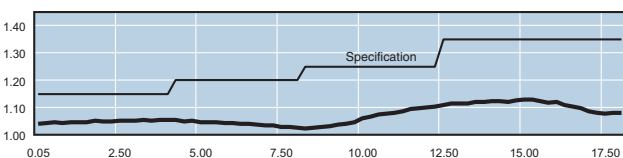

Typical SWR of a 32-10

POWER RATING: 2 watts **average** to 25°C ambient temperature, derated linearly to 0.5 watts at 125°C. 500 watts **peak** (5 μsec pulse width; 0.2% duty cycle).

POWER COEFFICIENT: < 0.005 dB/dB/watts

TEMPERATURE COEFFICIENT: < 0.0004 dB/dB/°C

TEMPERATURE RANGE: -55°C to +125°C


CONNECTORS: SMA connectors per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connectors.

CONSTRUCTION: Passivated stainless steel body and connectors; gold plated beryllium copper contacts. Each unit is sealed using low outgassing sealant.

WEIGHT:

dB VALUE	WEIGHT (Net)
0 - 12	3.9 g (0.14 oz)
12.5 - 20	4.3 g (0.15 oz)

PHYSICAL DIMENSIONS:

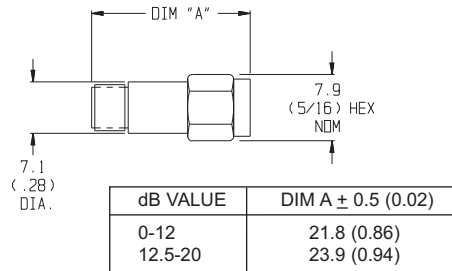

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

Screening

Units are screened 100% as follows:

Thermal Shock: 10 cycles, -55°C to +100°C


Peak Power: 200 Watts, 5 μsec pulse width; 0.05% duty cycle for 3 minutes at each end. DC Attenuation is measured before and after peak power.

Monitored Thermal Cycle: Units are subjected to 10 thermal cycles between -55 °C to +100 °C. The PIN-to-PIN DC resistance is continuously monitored and stored.

Attenuation and SWR are tested as final electrical test.

MODEL NUMBER DESCRIPTION:

Example:



EXPORT CONTROL:

This document contains controlled technical data under the jurisdiction of The Export Administration Regulations (EAR), 15 CFR 730-774. It cannot be transferred to any foreign third party without the specific prior approval of the U.S. Department of Commerce Bureau of Industry and Security (BIS) Violations of these regulations are punishable by fine, imprisonment or both.

A license from the U.S. Department of Commerce is required prior to the export of this product from the United States.