

ADAPTERS, IN-SERIES 2.9mm

DC - 26.5 GHz FLANGE MOUNT



MODELS: 5338

SPECIFICATIONS:

Electrical:


Frequency Range _____ DC - 26.5 GHz
VSWR
DC - 18 GHz _____ 1.15:1 Max.
18 - 26.5 GHz _____ 1.25:1 Max.
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C

Mechanical:

Connectors _____ Passivated Stainless Steel
(Mates both Mechanically & Electrically with
all SMA, K*, & 3.5mm Series Connectors)
Conductors _____ Gold Plated Beryllium Copper

*K is a Trademark of Wiltron Corp.

Model Number: **5338**
Female/Female Connector

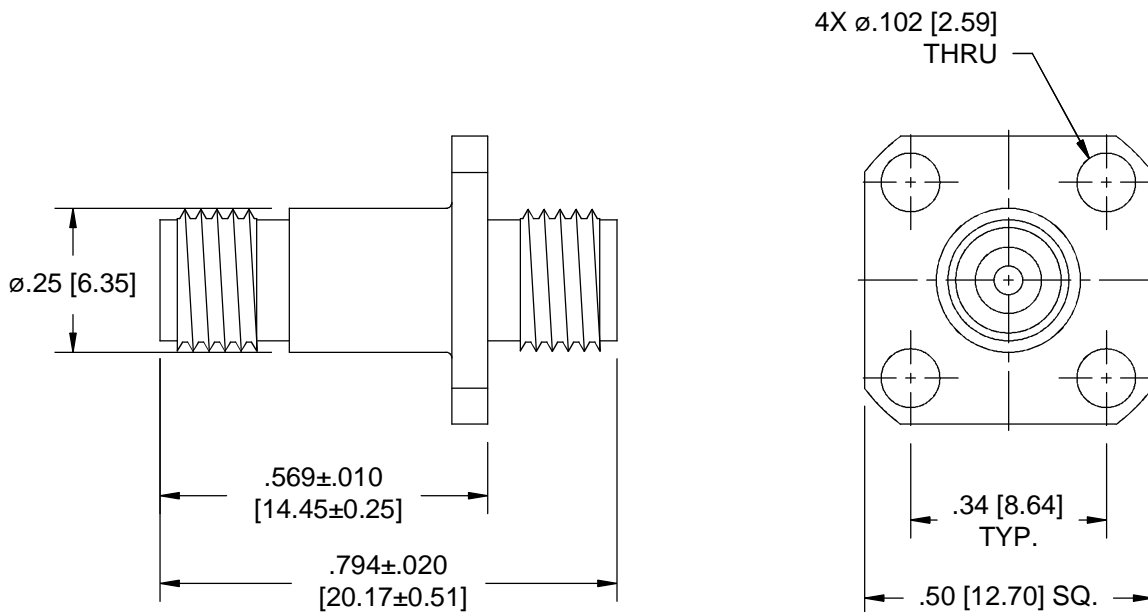

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5338; REV B

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com