

DC BLOCK, BETWEEN SERIES 10 MHz - 4 GHz BNC / SMA



MODELS: 8313

SPECIFICATIONS:


Electrical:

Frequency Range _____ 10 MHz – 4 GHz
 VSWR _____ 1.35:1 Max.
 Impedance _____ 50 Ohms
 Insertion Loss _____ 0.5 dB Max.
 Voltage Rating _____ 100 Volts Max.
 Operating Temp. Range _____ -65°C to +125°C


Mechanical:

SMA Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
 BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
 Conductors _____ Gold Plated Beryllium Copper


Model Number: **8313MM**
BNC Male / SMA Male

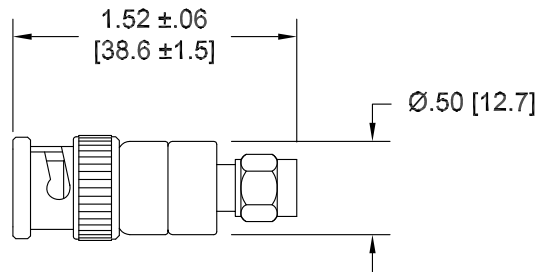


Model Number: **8313MF**
BNC Male / SMA Female

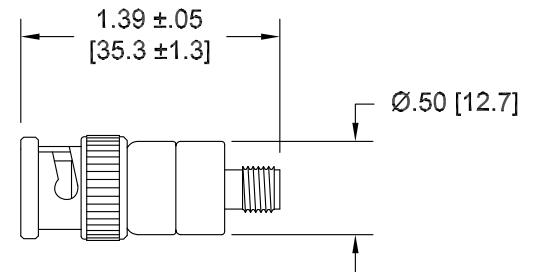

Model Number: **8313FM**
BNC Female / SMA Male

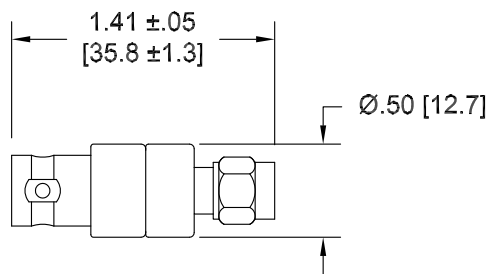

Model Number: **8313FF**
BNC Female / SMA Female

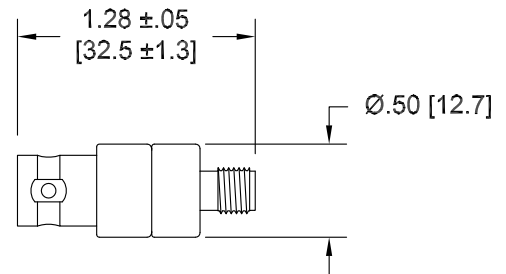

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 Design specifications are subject to change without notice.
 Contact factory for technical specifications before purchasing or use.