


DESCRIPTION

- 44 MHz SAW bandpass filter with 6 MHz bandwidth for Broadband Access.
- 24.6 x 9 mm SMP.
- RoHS compliant.

TYPICAL PERFORMANCE

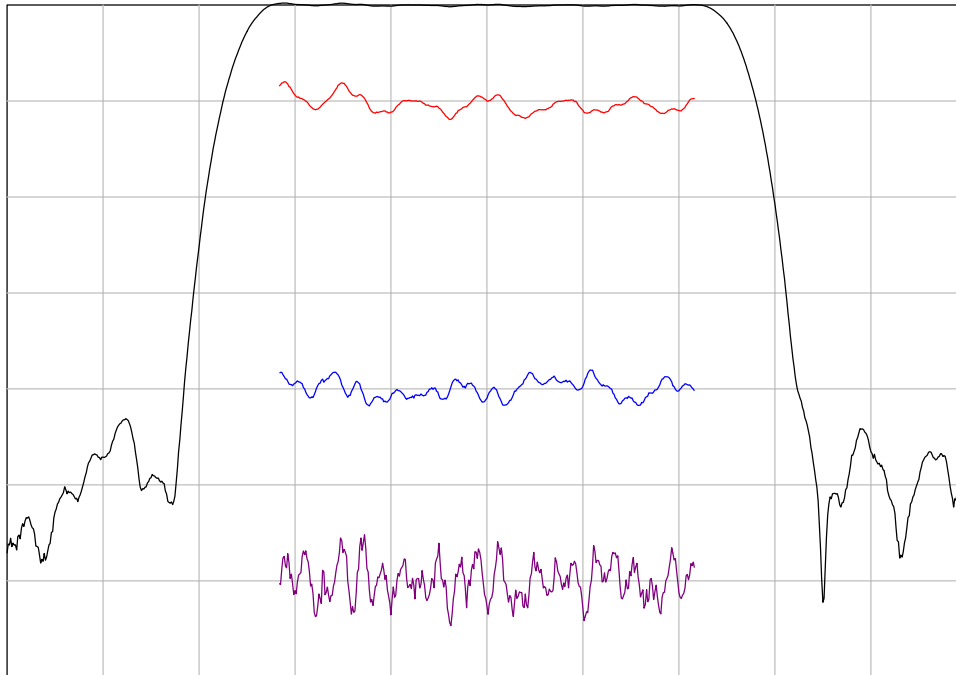

Horizontal:	Frequency :	1.2	MHz/div
Vertical from top:	Relative Magnitude :	10	dB/div
	Relative magnitude :	1	dB/div
	Phase Linearity :	3	deg/div
	Group Delay Deviation :	50	ns/div

SPECIFICATION


Parameter	Min	Typ	Max	Units
Center Frequency (Fc) ¹	43.8	44.0	44.2	MHz
Insertion Loss ²	-	21.5	23	dB
1 dB Bandwidth	5.50	5.70	-	MHz
3 dB Bandwidth	6.00	6.10	-	MHz
38 dB Bandwidth	-	7.60	8.00	MHz
Passband Amplitude Ripple ³	-	0.4	0.6	dB p-p
Passband Phase Ripple ³	-	1.5	3	deg p-p
Passband Group Delay Ripple ³	-	50	80	ns p-p
Rejection (10 to 39 MHz)	40	45	-	dB
Rejection (49 to 80 MHz)	40	45	-	dB
Absolute Delay	-	2.00	-	μs
Ambient Temperature	-	25	-	°C
Source / Load Impedance	-	50	-	Ω
Temperature Coefficient of Frequency	-	-72	-	ppm/ °C
Substrate Material	128 Lithium Niobate			

- Notes:
1. Defined as the average of the lower and upper 3 dB frequencies.
 2. Value at 44 MHz.
 3. Measured over Fc +/- 2.59 MHz.
 4. Specifications are guaranteed over the operating temperature range.

MAXIMUM RATINGS


Parameter	Min	Max	Units
Storage Temperature Range	-40	85	°C
Operating Temperature Range	20	30	°C
Input Power Level		10	dBm

MATCHING CIRCUIT

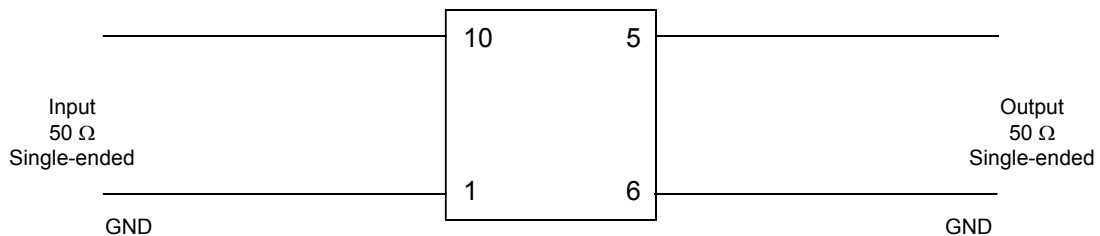


Note: External matching components are not required.

PACKAGE OUTLINE

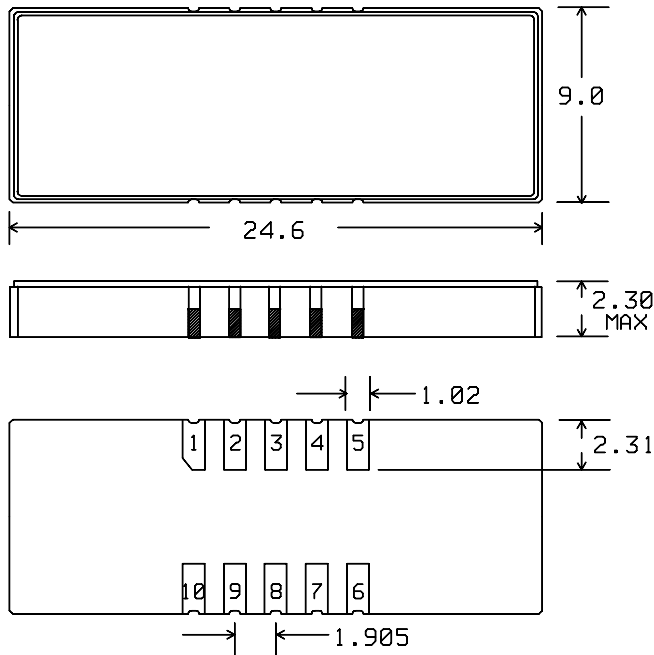

Package Material:
Body: Al_2O_3 ceramic
Lid: Kovar, Ni plated
Terminations: Au plating 1 μ m min,
over a 1.3-8.9 μ m Ni plating

SUGGESTED FOOTPRINT

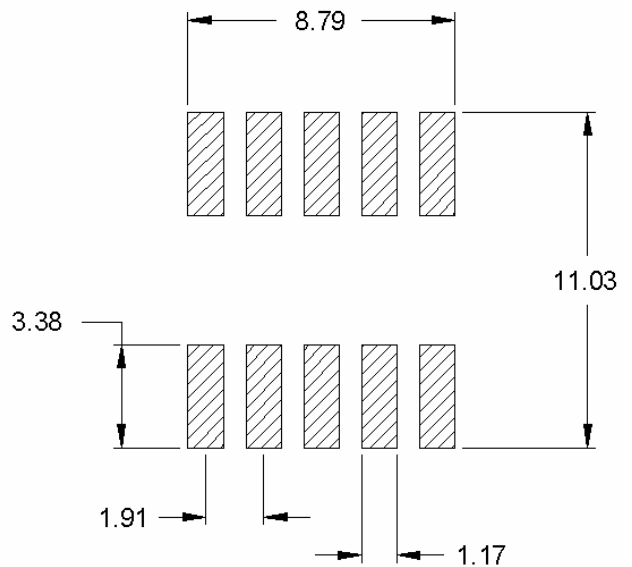

Units: mm

Tolerances are ± 0.15 mm except for the overall length, width and pad dimensions, which are nominal values.

Pad Configuration:

Input:	10
Input return:	1
Output:	5
Output return:	6
Ground:	2,3,4,7,8,9

ISO 9001
Registered

All specifications are believed to be accurate and reliable. However, Spectrum Microwave reserves the right to make changes without notice.
© 2010 All rights reserved.