

Voltage Controlled Oscillator

Low Noise Bipolar Transistor

Model TOM9331

1725 to 1790 MHz

Features

- Low Noise Bipolar Transistor
- Linear Tuning
- Operating Case Temp. -35 °C to + 60 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta = +25 °C	MIN/MAX Ta = -35°C to +60 °C
Frequency	1725 - 1790 MHz	1725 - 1790 MHz
Output Power (dBm)	+9.5	+8.0 Min.
Power Flatness (dBm)	±0.5	±0.75 Max.
Tuning Voltage Range (V)	0.5 to 4.5	0.0 to 5.0
Tuning Voltage Sensitivity (MHz/V)	20.0	15.0 Min.
Harmonics (dBc)	-30	-20 Max.
Spurious (dBc)	<- 80	<- 80 Max.
Phase Noise @ 100 KHz (dBc/Hz)	-104	-100 Max.
Pushing (MHz/V)	6.0	9.0 Max.
Pulling (MHz); 12 dB RL	40.0	55.0 Max.
Frequency Drift (MHz/°C)	-0.35	-0.50 Max.
Power Vdc	+5	+5
mA	30.0	35.0 Max.

Maximum Ratings


Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 10 Volts
 Maximum DC Tuning Voltage + 15 Volts
 Minimum DC Tuning Voltage 0 Volts

Packaging Options (see Appendix)


TOM9331, 4 Pin TO-8 (T4)
 TON9331, 4 Pin Surface Mount (SM3)
 BXO9331, Connectorized Housing (H1)

Note: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

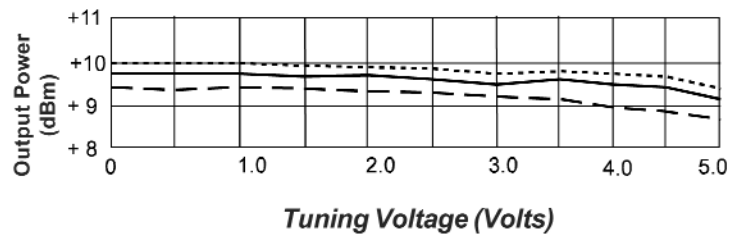

V _t (V)	f _o (MHz)	Δf (MHz)	P _o (dBm)	2H (dBc)	3H (dBc)
0.00	1707.0		+9.79	-31.5	-37.9
0.50	1718.3	22.5	+9.80	-30.9	-39.8
1.00	1730.1	23.8	+9.81	-30.7	-36.8
1.50	1741.5	22.7	+9.72	-30.5	-33.9
2.00	1751.5	20.0	+9.70	-30.3	-36.6
2.50	1762.1	21.3	+9.64	-30.4	-32.7
3.00	1770.6	17.0	+9.48	-29.7	-33.4
3.50	1779.4	17.5	+9.51	-29.8	-32.4
4.00	1788.1	17.5	+9.35	-29.5	-31.8
4.50	1797.3	18.2	+9.29	-29.8	-32.5
5.00	1806.0	17.5	+9.17	-29.7	-31.7

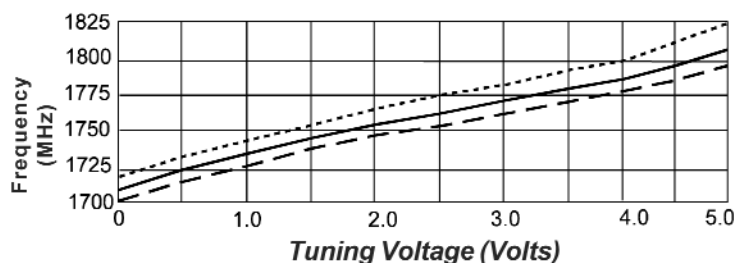

Legend ——— + 25 °C - - - - +60 °C - - - - -35 °C



SPECTRUM MICROWAVE • 2144 Franklin Drive N.E. • Palm Bay, Florida 32905 • Phone: (888) 553-7531 • Fax: (888) 553-7532
 SPECTRUM CONTROL GmbH • Hansastrasse 6 • 91126 Schwabach, Germany • Phone: (49)-9122-795-0 • Fax: (49)-9122-795-58