

Double Balanced Mixer

Model MM9xMS-3 Model MM9xMS-13

Multi-Octave Band

RF 4.0 to 20.0 GHz

Electrical Specifications:⁽¹⁾


Parameter	Conditions			Specifications		
	RF (GHz)	LO (GHz)	IF (MHz)	Min	Typical	Max
SSB Conversion loss: ^{(2) (3)}	5.0-18.5	5.0-18.5	DC-500		6.5 dB	8.0 dB
	5.0-18.5	5.0-18.5	DC-2000		7.0 dB	8.5 dB
	5.0-18.5	5.0-18.5	DC-4000		8.0 dB	9.5 dB
	4.0-20.0	4.0-20.0	DC-500		7.0 dB	9.5 dB
	4.0-20.0	4.0-20.0	DC-2000		7.5 dB	10.0 dB
	4.0-20.0	4.0-20.0	DC-4000		8.5 dB	11.5 dB
Isolation		LO to RF:	4.0-5.0	20 dB	30 dB	
		LO to IF:	5.0-20.0	25 dB	38 dB	
		RF to IF:	4.0-7.0	16 dB	21 dB	
Input 1-dB Compression Point:	4.0-20.0	4.0-20.0	DC-4000		+2 dBm	MM93
					+5 dBm	MM94
Input Third Order Intercept Point:	4.0-20.0	4.0-20.0	DC-4000		+8 dBm	MM96
					+12 dBm	MM97
					+11 dBm	MM93
					+14 dBm	MM94
LO Power: ⁽⁴⁾	4.0-20.0	4.0-20.0	DC-4000		+18 dBm	MM96
					+14 dBm	MM97
					+7 dBm	MM93
					+10 dBm	MM94

Model MM9xMS-3
Model MM9xMS-13


LO Power ←
3 = +7 dBm
4 = +10 dBm
6 = +14 dBm
7 = +18 dBm

Notes:

- Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25° C with the nominal LO power. Specifications indicated as typical are not guaranteed.
- Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
- Conversion loss typically degrades less than 0.5 dB at +100° C and improves less than 0.5 dB at -55° C.
- Usable LO drives are up to 2 dB below and 3 dB above nominal.

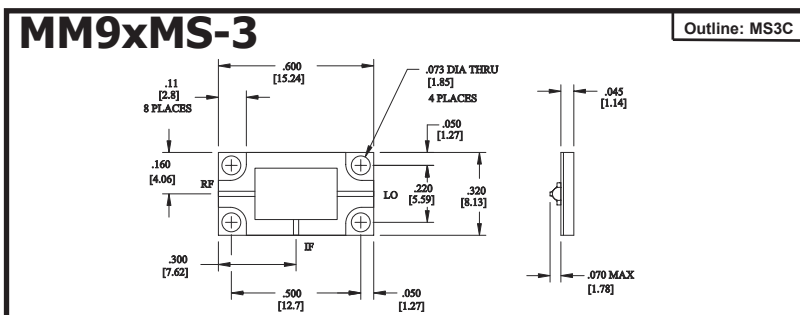

Outline: MS3C

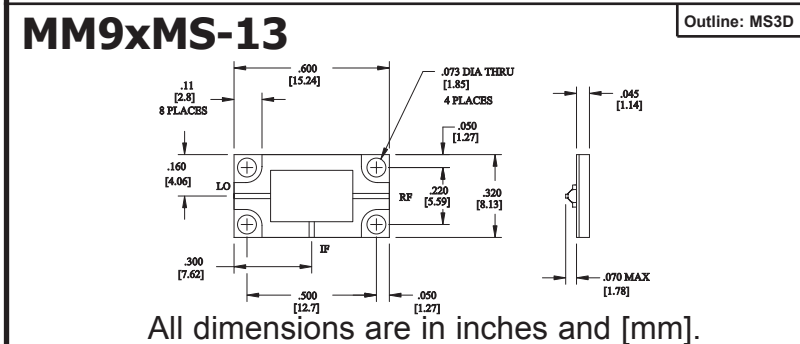

Outline: MS3D

All dimensions are in inches and [mm].

Typical Performance at 25° C

