


Termination, Flanged

Frequency Range: DC to 4 GHz, Power: 25 Watts



Features

- High Power
- Thin Film Design
- Integrated Heat Sink

Designed to uniformly reduce power of the RF signal while generating only a small reflection, even under maximum power conditions.

Technical Specifications


Parameter	Value
Frequency Range	DC to 4 GHz
Impedance	50 Ohms
Power Handling*	25 Watts average Derated Linearly to 0 Watts @ +150°C
VSWR	DC – 2.5 GHz _____ 1.35:1 Max. 2.5 – 4.0 GHz _____ 1.60:1 Max.
Operating Temp Range	-55°C to +150°C

Material

Feature	Material
Substrate	Aluminum Nitride
Resistor Material	Proprietary Thin Film
Cover	Alumina Ceramic
Flange	Nickel Plated Copper
Tab	Gold Plated Beryllium Copper

*Mounting surfaces shall not exceed 100°C. Max.

How to Order

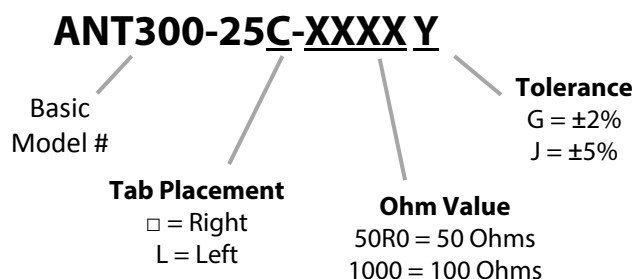


Ordering Examples

Model Number: ANT300-25-50R0J
 Right tab placement, 50 ohm, ±5%

Model Number: ANT300-25L-2000G
 Left tab placement, 200 ohm, ±2%


Performance Characteristics

Typical Performance

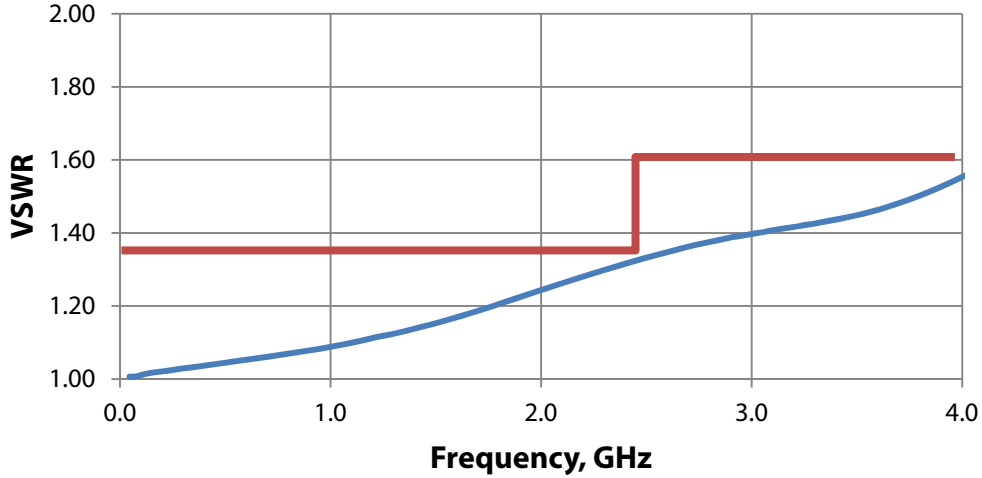

Physical Dimensions

Model Number: ANT300-25-50R0J Shown

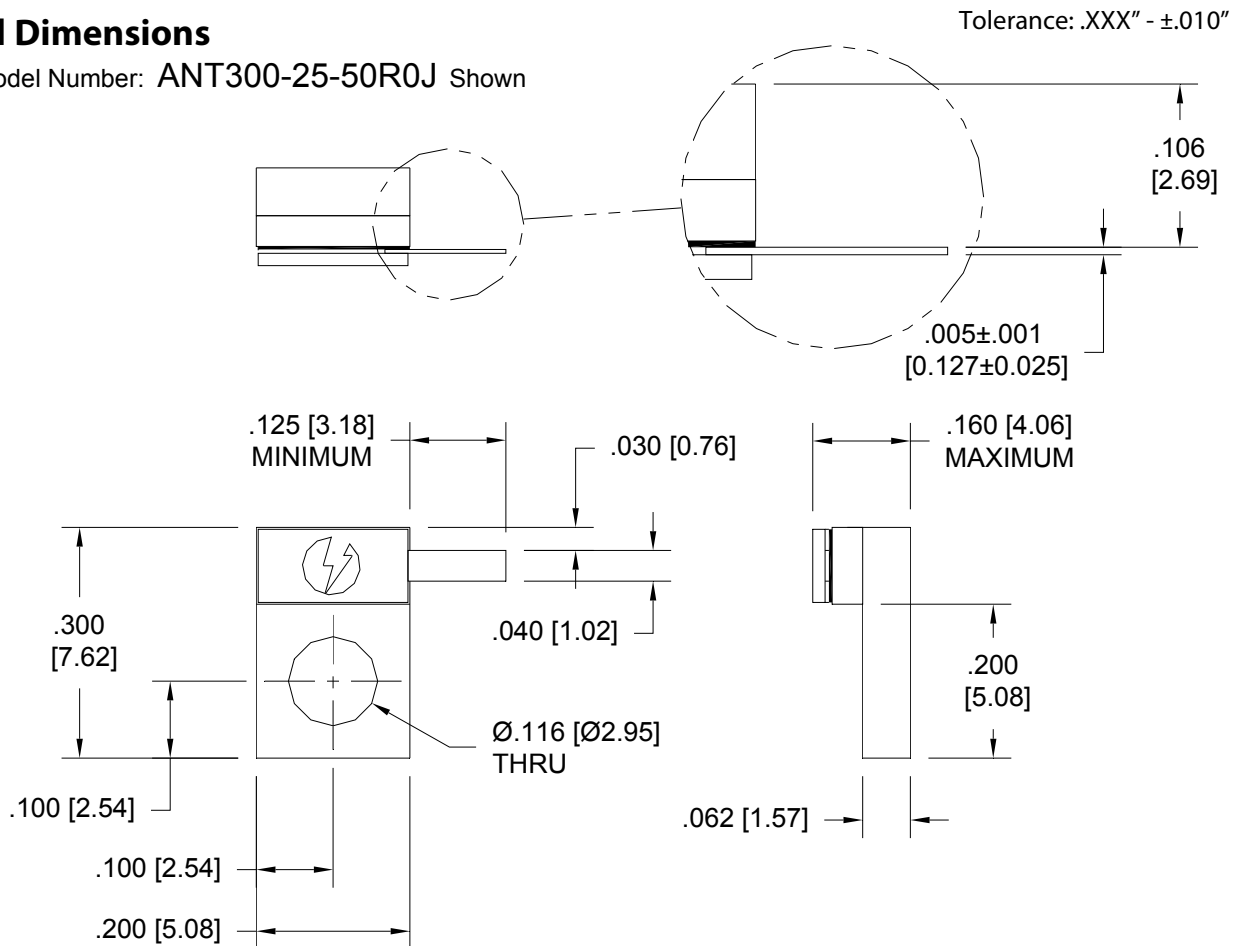

Note: Dimensions in Brackets [] are expressed in Millimeters and are for reference only