

TERMINATIONS

SMP, 18 GHz, 1 Watt

SPECIFICATIONS:

Models TP180M

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:


Frequency Range _____ DC -18 GHz
VSWR:
DC - 18 GHz _____ 1.20:1 Max.
Impedance _____ 50 Ohms
Input Power _____ 1 Watt Avg. @ +25°C
Operating Temp Range _____ -65°C to +125°C

Mechanical:

GPO™ Connectors _____ Gold Plated Beryllium Copper
(GPO connectors Mate with SMP connectors IAW MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper
Housing _____ Gold Plated Brass

Model Numbers: **TP180M**

SMP Male Connector

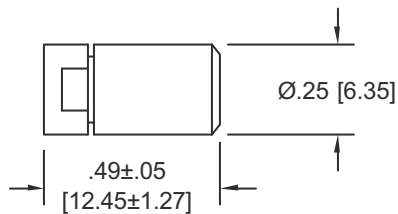

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design, specifications are subject to change without notice. Contact factory for technical specifications before purchasing or use.

TP180: REV G (M)

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com