

TERMINATIONS TNC

**DC - 18 GHz
10 WATTS**



MODELS: TTXXM-10W, TTXXF-10W

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 18 GHz
 Standard Freq. Values _____ 6, 12.4 & 18 GHz
 VSWR
 DC - 6 GHz _____ 1.20:1 Max.
 6 - 12.4 GHz _____ 1.30:1 Max.
 12.4 - 18 GHz _____ 1.40:1 Max.
 Impedance _____ 50 Ohms
 Input Power _____ 10 Watts Avg. @ +25°C
 _____ Derated Linearly to 2 Watts @ +125°C
 Peak Power _____ 500 Watts Max.
 _____ (5uSec Pulse, .05% Duty Cycle)
 Operating Temp Range _____ -65°C to +125°C


Mechanical:

TNC Connectors* _____ Passivated Stainless Steel
 _____ Mates with MIL-STD-348
 Housing _____ Anodized Aluminum
 Conductors _____ Gold Plated Beryllium Copper

*TNC Connectors are Mode-Free to 18 GHz

Model Number: **TTXXXM-10W**
 TNC Male Connector

Model Number: **TTXXXF-10W**
 TNC Female Connector

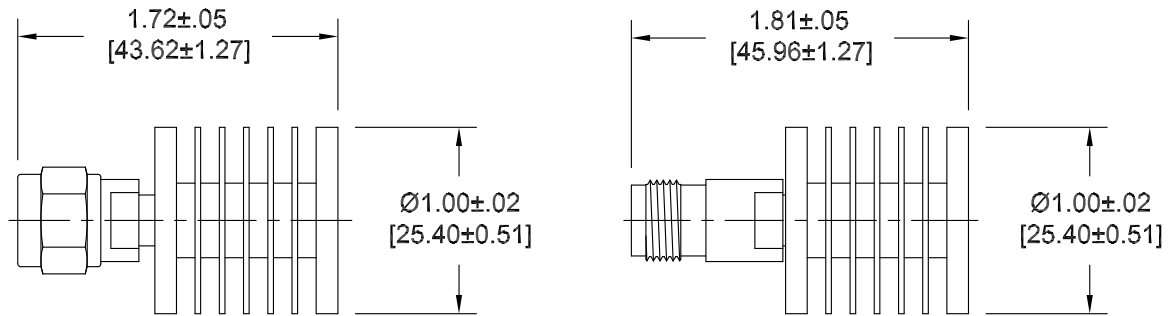

HOW TO ORDER:

Model Number: **TTXXXY-10W**
 Frequency Range _____ Connector Configuration
 060 = DC - 6 GHz M = Male
 120 = DC - 12.4 GHz F = Female
 180 = DC - 18 GHz

Ordering Examples:

Model Number: **TT120M-10W**
 DC - 12.4 GHz; TNC Male
 Model Number: **TT060F-10W**
 DC - 6 GHz; TNC Female
 Model Number: **TT180M-10W**
 DC - 18 GHz; TNC Male

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 Design specifications are subject to change without notice.
 Contact factory for technical specifications before purchasing or use.